

[root@ipa-server carlos]# kinit admin

Password for admin@EXAMPLE.COM:

[root@ipa-server carlos]# klist

Ticket cache: KEYRING:persistent:0:0

Default principal: admin@EXAMPLE.COM

Valid starting Expires Service principal

03/03/17 09:43:11 04/03/17 09:43:08 krbtgt/EXAMPLE.COM@EXAMPLE.COM

[root@ipa-server carlos]# ipa host-add-managedby ipa-replica.example.com --hosts=ipa-server.example.com

Nombre del equipo: ipa-replica.example.com


Nombre principal: host/ipa-replica.example.com@EXAMPLE.COM

Principal alias: host/ipa-replica.example.com@EXAMPLE.COM

Miembro de los grupos de equipo: ipaservers

Managed by: ipa-replica.example.com, ipa-server.example.com

Cantidad de miembros añadidos 1

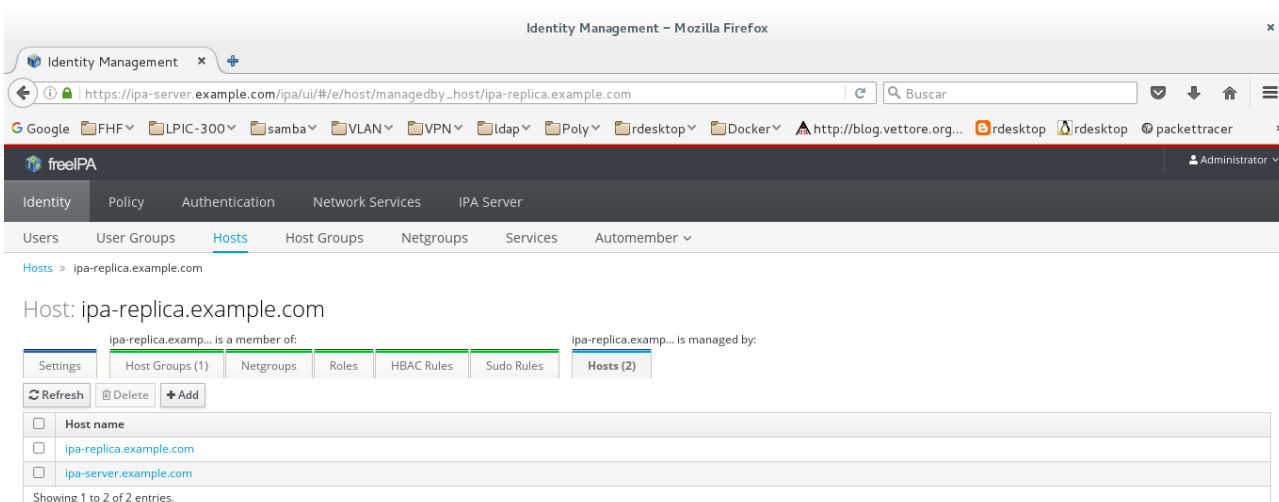

```
[root@ipa-server carlos]# klist -k /etc/krb5.keytab
```

Keytab name: FILE:/etc/krb5.keytab

KVNO Principal

```
-----
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
[root@ipa-server carlos]# kinit -kt /etc/krb5.keytab host`hostname`
```

```
[root@ipa-server carlos]# klist
```

Ticket cache: KEYRING:persistent:0:krb_ccache_da1Lggy

Default principal: host/ipa-server.example.com@EXAMPLE.COM

Valid starting Expires Service principal

03/03/17 09:47:09 04/03/17 09:47:09 [krbtgt/EXAMPLE.COM@EXAMPLE.COM](#)

```
[root@ipa-server carlos]# klist -k /etc/krb5.keytab
```

Keytab name: FILE:/etc/krb5.keytab

KVNO Principal

```
-----
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
[root@ipa-server carlos]# kinit -kt /etc/krb5.keytab host`hostname`
```

```
[root@ipa-server carlos]# klist
```

```
Ticket cache: KEYRING:persistent:0:krb_ccache_da1Lggy
```

```
Default principal: host/ipa-server.example.com@EXAMPLE.COM
```

```
Valid starting Expires Service principal
```

```
03/03/17 09:47:09 04/03/17 09:47:09 krbtgt/EXAMPLE.COM@EXAMPLE.COM
```

```
[root@ipa-server carlos]# ipa-getkeytab -s `hostname` -k /tmp/ipa-replica.keytab -p host/ipa-replica.example.com
```

```
Tabla de claves recuperada y almacenada correctamente en:/tmp/ipa-replica.keytab
```

```
[root@ipa-server carlos]# klist -k /tmp/ipa
```

```
[root@ipa-server carlos]# klist -k /tmp/ipa-replica.keytab
```

```
Keytab name: FILE:/tmp/ipa-replica.keytab
```

```
KVNO Principal
```

```
-----  
2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
[root@ipa-server carlos]# klist -k /etc/krb5.keytab
```

```
Keytab name: FILE:/etc/krb5.keytab
```

```
KVNO Principal
```

```
-----  
2 host/ipa-server.example.com@EXAMPLE.COM
```

```
2 host/ipa-server.example.com@EXAMPLE.COM
```

```
2 host/ipa-server.example.com@EXAMPLE.COM
```

```
2 host/ipa-server.example.com@EXAMPLE.COM
```

```
2 host/ipa-server.example.com@EXAMPLE.COM
```

```
2 host/ipa-server.example.com@EXAMPLE.COM
```

```
[root@ipa-server carlos]# klist -k /tmp/ipa-replica.keytab
```

```
Keytab name: FILE:/tmp/ipa-replica.keytab
```

```
KVNO Principal
```

```
-----  
2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
[root@ipa-server carlos]# ktutil
```

```
ktutil: read_kt /etc/krb5.keytab
```

```
ktutil: l
```

```
slot KVNO Principal
```

```
-----  
1 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
2 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
3 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
4 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
5 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
6 2 host/ipa-server.example.com@EXAMPLE.COM
```

```
ktutil: read_kt /tmp/ipa-replica.keytab
```

```
ktutil: l
```

```
slot KVNO Principal
```

```
-----  
1 2 host/ipa-server.example.com@EXAMPLE.COM  
2 2 host/ipa-server.example.com@EXAMPLE.COM  
3 2 host/ipa-server.example.com@EXAMPLE.COM  
4 2 host/ipa-server.example.com@EXAMPLE.COM  
5 2 host/ipa-server.example.com@EXAMPLE.COM  
6 2 host/ipa-server.example.com@EXAMPLE.COM  
7 2 host/ipa-replica.example.com@EXAMPLE.COM  
8 2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
ktutil: write_kt /tmp/ipa-replica_fusionado.keytab
```

```
ktutil: q
```

```
[root@ipa-server carlos]# ktutil
```

```
ktutil: read_kt /tmp/ipa-replica_fusionado.keytab
```

```
ktutil: l
```

```
slot KVNO Principal
```

```
-----  
1 2 host/ipa-server.example.com@EXAMPLE.COM  
2 2 host/ipa-server.example.com@EXAMPLE.COM  
3 2 host/ipa-server.example.com@EXAMPLE.COM  
4 2 host/ipa-server.example.com@EXAMPLE.COM  
5 2 host/ipa-server.example.com@EXAMPLE.COM  
6 2 host/ipa-server.example.com@EXAMPLE.COM  
7 2 host/ipa-replica.example.com@EXAMPLE.COM  
8 2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
ktutil: q
```

```
[root@ipa-server carlos]# klist -k /tmp/ipa-replica_fusionado.keytab
```

```
Keytab name: FILE:/tmp/ipa-replica_fusionado.keytab
```

```
KVNO Principal
```

```
-----  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-server.example.com@EXAMPLE.COM  
2 host/ipa-replica.example.com@EXAMPLE.COM  
2 host/ipa-replica.example.com@EXAMPLE.COM
```

```
[root@ipa-server carlos]# mv /tmp/ipa-replica_fusionado.keytab /etc/krb5.keytab
```

```
mv: ¿sobrecribir «/etc/krb5.keytab»? (s/n) s
```

```
[root@ipa-server carlos]# klist -k /etc/krb5.keytab
```

```
Keytab name: FILE:/etc/krb5.keytab
```

```
KVNO Principal
```

```
2 host/ipa-server.example.com@EXAMPLE.COM
2 host/ipa-server.example.com@EXAMPLE.COM
2 host/ipa-server.example.com@EXAMPLE.COM
2 host/ipa-server.example.com@EXAMPLE.COM
2 host/ipa-server.example.com@EXAMPLE.COM
2 host/ipa-server.example.com@EXAMPLE.COM
2 host/ipa-replica.example.com@EXAMPLE.COM
2 host/ipa-replica.example.com@EXAMPLE.COM
```

[root@ipa-server carlos]# klist

Ticket cache: KEYRING:persistent:0:krb_ccache_da1Lggy

Default principal: host/ipa-server.example.com@EXAMPLE.COM

Valid starting	Expires	Service principal
03/03/17 09:49:11	04/03/17 09:47:09	ldap/ipa-server.example.com@EXAMPLE.COM
03/03/17 09:47:09	04/03/17 09:47:09	krbtgt/EXAMPLE.COM@EXAMPLE.COM